



SMS Monitor for S60 3rd/5th edition

User manual

Brief description

SMS Monitor is a powerful tool for remote sms-monitoring. The main purpose of this application is parental controls and security audit. Program sends incoming and outgoing sms from mobile phone where it is installed to your number silently. All messages would be sent in hidden mode (application is not shown in phone menu, do not keep copies of sms in sent and reports folders and do not shown in Task List) which is can be useful if you do not want your child (or another person) to know that you read his/her messages.

WARNING! This application is intended to be used only for private and legal purposes. It cannot be used for violating anyone's rights, spying or other illegal purposes. User of SMS Monitor takes all responsibility for using this application in any illegal use cases.

Main features:

- Sends copies of all incoming and outgoing sms to specified number
- Can be configured remotely by sms-commands
- Can send copies of messages from particular list of contacts
- Can be turned off/on remotely
- Number to which copies of sms are sent can be changed remotely
- Automatic startup at phone boot
- Can block all incoming and outgoing calls remotely

Remote configuring and command format

SMS Monitor can be configured remotely using sms-commands which are sent from administrator number (number to which all messages copies are sent to). This sms should have following format:

Administrator number specifying:

Set admin

– this command should be sent right after application installation and activating. Please use mobile which you wish to use as administrator mobile for sending this command. After that all messages will be sent to this number. Please make sure that sms with this command is deleted from monitoring phone automatically. It would mean that everything is ok and application can be used without any problem. You can always change administrator number by sending command **Set admin number** where “number” is your new administrator number.

Remote switching application state:

On

– application functional is turned on (this state is used as default just right after application install and specifying administrator number)

Off

– application functional is turned off

Specifying list of contacts from which sms messages should be sent to admin number (use this command if you want to read messages which are sent to and received from particular contacts. By default SMS Monitor will send you all messages from all contacts):

Add sender +79161234567,+79031234567,+79261234567

– after receiving this command SMS Monitor will send you copies of sms sent to and received from numbers +79161234567,+79031234567,+79261234567. Please provide 10 or less numbers per command message. You can send as many Add commands as you want. All numbers will be added to list. SMS from number which are not in list will be ignored. “Add” command switches off default (sending all messages) mode. All numbers should be separated by comma (“,”) without any spaces. Please do not put any additional spaces or other characters to the end of the message. If you want to monitor messages to and from just one particular contact this command can be used as follows:

Add sender +79161234567

Please note that all numbers should be provided in international format with “+” and country code.

To switch SMS Monitor back to default (sending all) mode use following command:

Add sender all

Removing numbers from contacts list:

Rem sender +79161234567

– this command would take place only if there is a list of contacts specified by “Add” or “Set” commands. If you want to remove all numbers from list use following format:

Rem sender all

Resetting list of contacts:

set sender +79161234567,+79162345678,+79163456789

- the main difference between this and “Add” command is resetting old list with numbers +79161234567, +79162345678 and +79163456789.

Remote incoming/outgoing calls blocking:

Block on

- blocking is on

Block off

- blocking is off (used by default)

Important notes

All configuring commands are non-case-sensitive. It means that command “Add sender +79031234567” and “add SENDER +79031234567” are equivalent and valid. But it is very important to remember that each word in the command is separated from other with just one space (“ ”) mandatory. All phone numbers in commands are separated with just one comma (“,”) without any additional spaces or other characters. At the end of the command should not be any spaces, commas or other characters.

Right after install of the SMS Monitor it is recommended to specify administrator number using “set admin” command.

SMS Monitor receive all configuration messages in hidden mode without sound indication. But it is not guaranteed in some cases when sound indication can start and suddenly stop. But all configuration messages are deleted automatically right after receiving. Please make sure that you send configuration message from administrator number.

Right after install and admin number specifying application is ready to work in default mode.

In some cases if vibrating alert is turned on phone can vibrate while configuring message receiving.

All messages are sent with specifying direction (outgoing/incoming) and sender/recipient of the sms as follows:

Message text Fr:+79161234567


Hereby +79161234567 – number from which incoming message has been received on target phone with SMS Monitor installed

Message text To:+79161234567


Hereby +79161234567 – number to which sms has been sent from phone with SMS Monitor installed

Installing and activating


Please install SMS Monitor to target phone you wish to monitor.

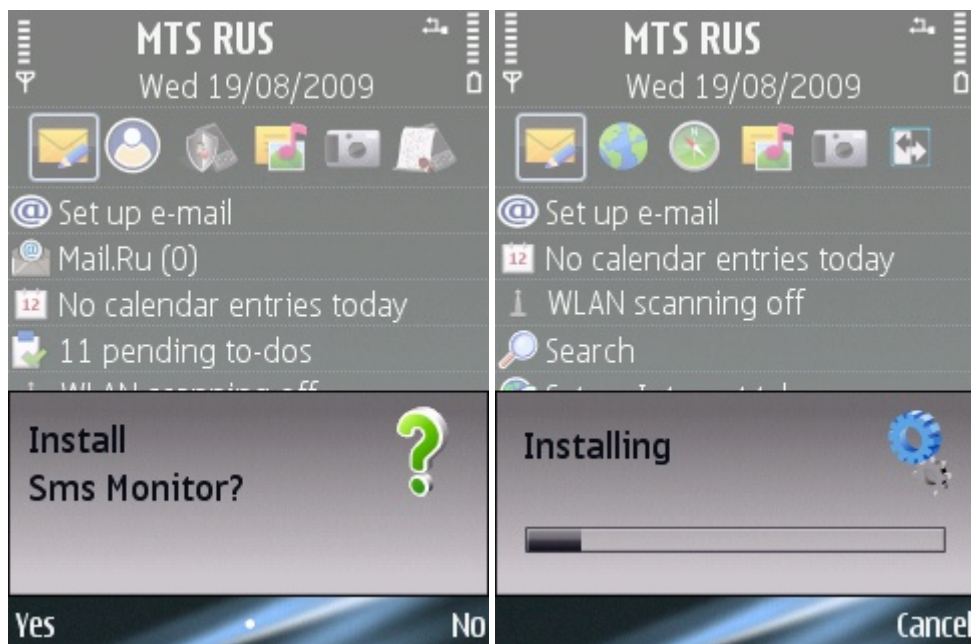


After install you will be provided with payment/activating menu:

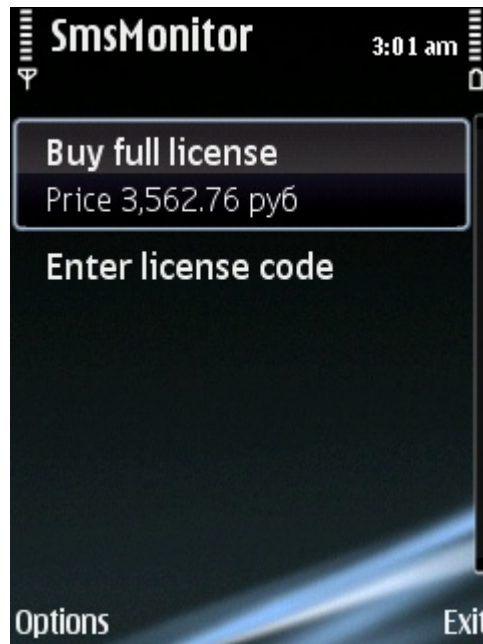

In case if you want buy application right now with mobile phone interface please choose first menu item (Buy full license) and choose suitable payment option:

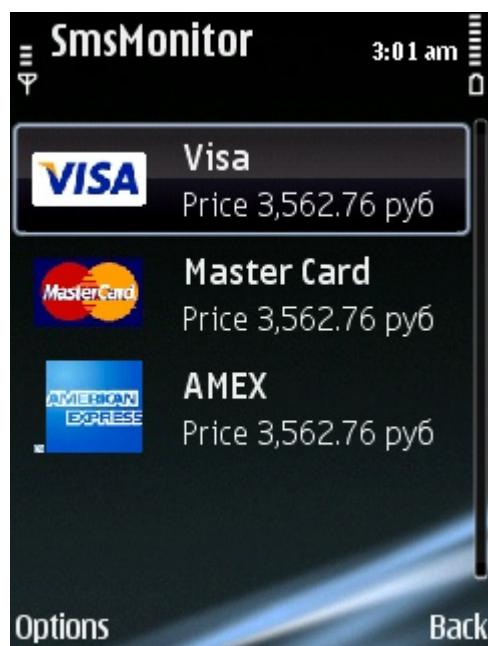

If you have already purchased application and have got license number please use second menu item to enter registration code and activate program:

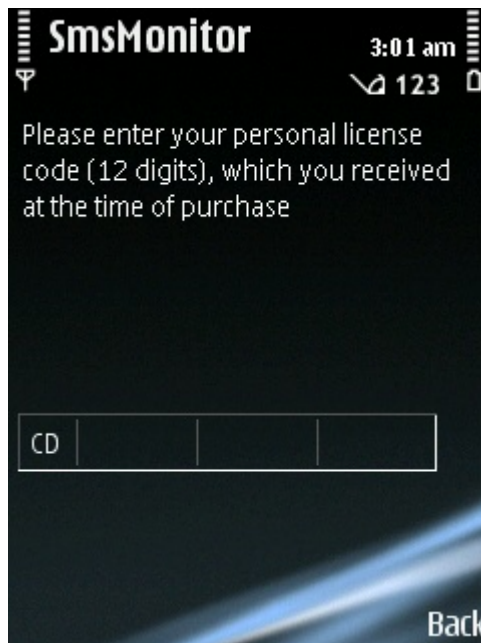

After that application is ready to work in default mode. Please specify administrator number using "Set admin" command.

ATTENTION! You will need internet connection on your mobile to finish application activation.

Brief instruction

- 1) Install SMS Monitor to phone you wish to monitor (sms copies from which will be sent to your number)
- 2) Buy application or use registration code to activate SMS Monitor using menu provided right after install.
- 3) Specify administrator number to which all incoming and outgoing messages will be sent using "Set admin" sms-command. Just send this command from admin phone and make sure it has been deleted from monitoring phone automatically.
- 4) Use configuration messages to configure SMS Monitor if needed.

If you have any questions or suggestions please do not hesitate to contact us: admin@dtarasov.ru.